

Proudly Australian



Filter Housing - Large Diameter

The Blue Large Standard Diameter Filter Housing is manufactured from Polypropylene which has excellent chemical resistance enabling it to be used in a variety of applications within the Domestic, Rural, Commercial and Light Industrial fields. The Filter Housing has a Double "O" Ring Seal built into the Housing Bowl providing it with added protection against leakage.

The Housing Cap has a Pressure Relief Button built in and mounting bosses to accommodate a Wall Mounting Bracket for easy installation. Unlike clear housings the Blue Polypropylene is opaque preventing light from penetrating which causes microbiological growth inside the filter housing.

Typical Applications

- Point of Use (POU)
- Whole of House
- Rural
- Drip Systems
- Micro Sprays
- Aquaculture
- Marine
- Domestic
- Commercial
- Light Industrial


General Specifications

- Port Size : 1" & 1½" BSP
- Dimensions **10"** **20"**
 Width: 184mm (7¼") 184mm (7¼")
 Height: 350mm (13¾") 610 mm (24")
- Temperature Ranges: 4.4°C - 43°C
(40°F - 110°F)
- Operating Pressure: **10"** 690 kPa (100 psi)
(Maximum) **20"** 620 kPa (90 psi)
- Recommended Flow Rate: **10"** 90 Lpm
(Maximum) **20"** 180 Lpm

NOTE: Flow rate will vary depending on type of filter cartridge installed.
(Filter Cartridge NOT included)

Optional Extras

- A. Wrench 10"/20" P/No. WAW1020HL
- B. Mounting Bracket P/No. WABS1020LW

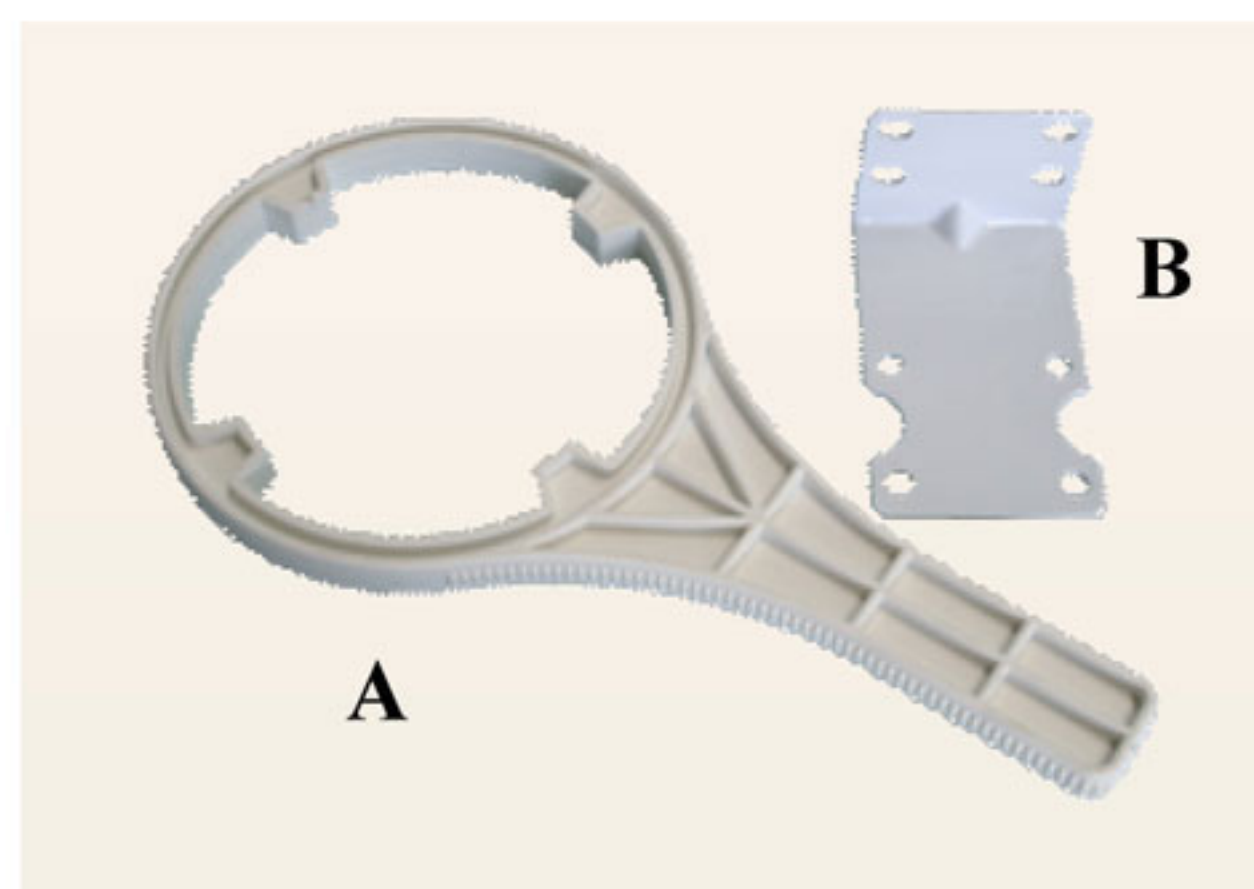

Warning:
For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection.

Series: WHLB



Filter Housing 1"-1½" Blue D.O.

Model No.

10"	20"
WH10LB10	WH20LB10
	WH20LB15
	<u>Kits</u>
WH10LB10K	WH20LB10K
	WH20LB15K

NOTE: Housings are also sold as Kits which includes; Housing, Bracket, Wrench and Box.

Phone
1800 069 800
0269 258 555

COOLABAH WATER

Ah... that's better !