
# Proudly Australian

# Polypropylene Filter Bag Vessel

(PENTEK Brand)

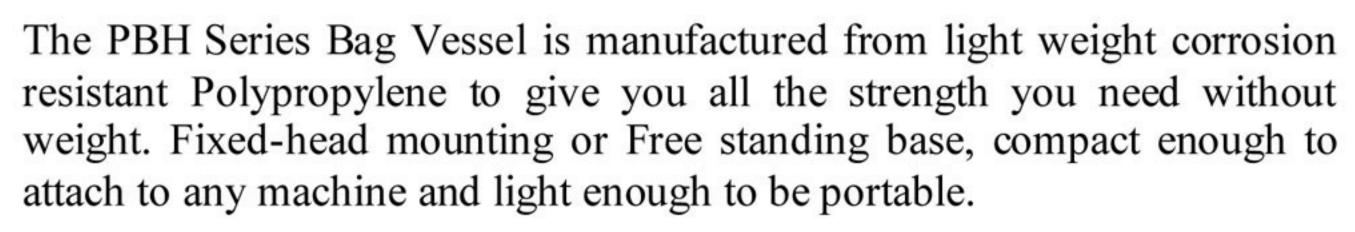

The Polypropylene material has excellent chemical resistance enabling it to be used in a variety of applications. The PBH Bag Vessel comes complete with filter bag basket, pressure gauge, wrench and 3/8" drain valve.

## Materials of Construction

Polypropylene Housing: Polypropylene Cap:

Bismuth Brass (Lead Free) Gauge:

Vent Plug: Polypropylene

Drain Plug: High Density Polypropylene

Ball Valve: PVC/Buna-N Seals Polypropylene Basket: O-Ring & Gaskets: Buna-N

## **General Specifications**

1½" NPT Port Size:

**Dimensions** 

(Not including Drain Valve and Pressure Gauge)

Width: 184mm (7<sup>1</sup>/<sub>4</sub>") 606mm (23%") Hight:

4.4°C - 37.8°C Temperature Ranges:

 $(40^{\circ} F - 100^{\circ} F)$ 

620 kPa (90 psi) Operating Pressure:

(Maximum)


Recommended Flow Rate: 190 Lpm


(Maximum)

**NOTE:** Flow rate will vary depending on micron rating of the filter bag installed. (Filter Bag NOT included)

#### **Optional Extras**

Bag Vessel Stand P/No. WA20FBVHS Mounting Bracket P/No. WA20FBVB

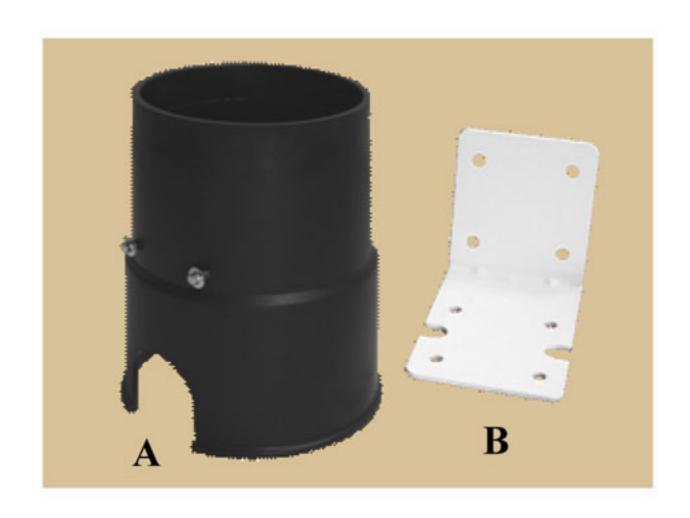

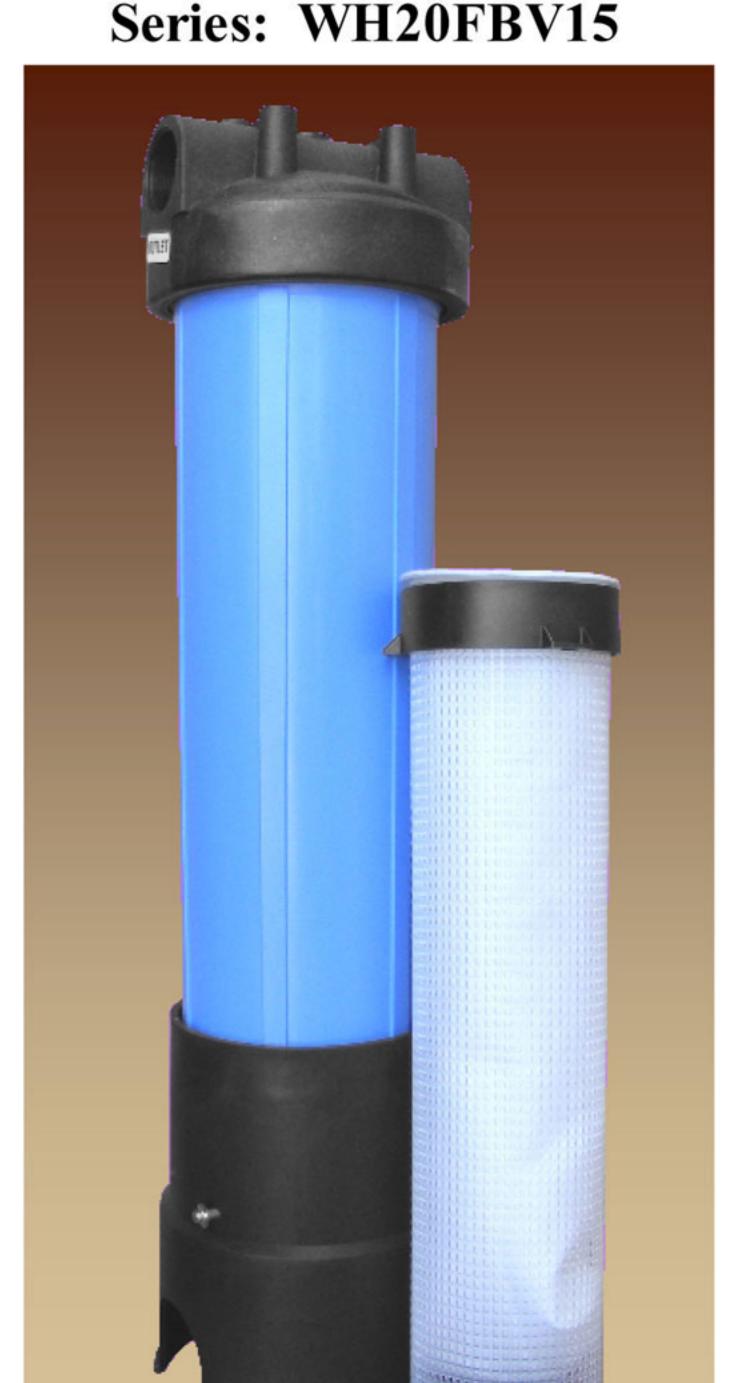

Filter Bag Vessel shown with Basket, Filter Bag and Optional Bag Vessel Stand.

### Warning:

For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection. Model No.

20"

WH20FBV15

Phone 1800 069 800 0269 258 555 COOLABAH WATER

Ah. that's better!