Filter Housing - Standard Diameter

The 10" White Standard Diameter Filter Housing is manufactured from Polypropylene which has excellent chemical resistance enabling it to be used in a variety of applications within the Domestic, Rural, Commercial and Light Industrial fields.

The Housing Cap is moulded with mounting bosses to accommodate a Wall Mounting Bracket. Unlike clear housings the White Polypropylene is opaque preventing light from penetrating which causes microbiological growth inside the filter housing.

Typical Applications

- Point of Use (POU)
- Undersink
- **Drinking Fountains**
- Ice Machines
- Beverage Dispensers

- Recreation Vehicles
- Marine
- Domestic
- Commercial
- Light Industrial

General Specifications

Port Size: 1/2" BSP

Dimensions

Proudly

Australian

Width: 118mm $(4\frac{5}{8}")$ Height: 312mm (12¹/₄")

4.4°C - 43°C Temperature Ranges:

(40°F - 110°F)

690 kPa (100 psi) Operating Pressure:

(Maximum)

Recommended Flow Rate: 30 Lpm


(Maximum)

NOTE: Flow rate will vary depending on type of filter cartridge installed.

(Filter Cartridge NOT included)

Optional Extras

A. Wrench P/No. WAW10HS P/No. WABS10SW Mounting Bracket

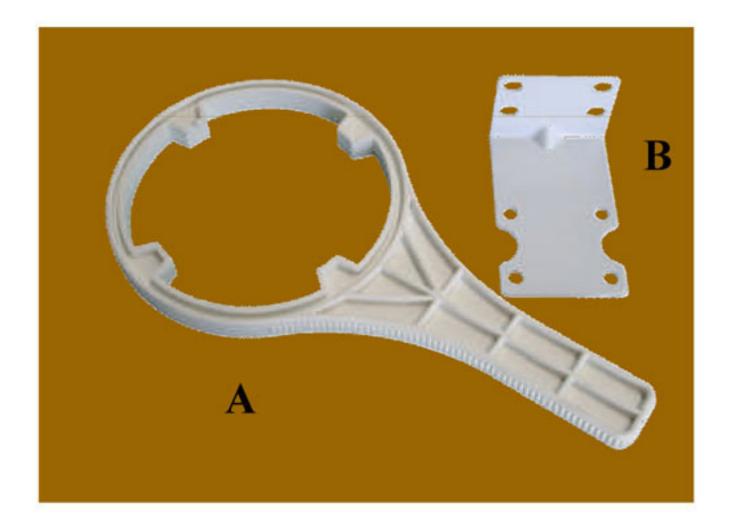

Warning:

For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection.



Model No.

10"

WH10SW12 WH10SW12K (Kit)

COOLABAH WATER

Ah. that's better!

Housings are also sold as Kits which includes; Housing, Bracket, Wrench and Box.