

**Proudly
Australian**



Filter Housing - Standard Diameter

The 10" White Standard Diameter Filter Housing is manufactured from Polypropylene which has excellent chemical resistance enabling it to be used in a variety of applications. The Filter Housing has a Double "O" Ring Seal built into the Housing Bowl providing it with added protection against leaking.

The Housing Cap is moulded with mounting bosses to accommodate a Wall Mounting Bracket. Unlike clear housings the White Polypropylene is opaque preventing light from penetrating which causes microbiological growth inside the filter housing.

Typical Applications

- Small Connection and/or Low Flow
- Undersink
- Drinking Fountains
- Ice Machines
- Beverage Dispensers
- Recreation Vehicles
- Marine
- Commercial


General Specifications

- Port Size : 1/4" BSP
- Dimensions
Width: 114mm (4 1/2")
Height: 295mm (11 1/2")
- Temperature Ranges: 4.4°C - 43°C
(40°F - 110°F)
- Operating Pressure: 690 kPa (100 psi)
(Maximum)
- Recommended Flow Rate: 5 Lpm
(Maximum)

NOTE: Flow rate will vary depending on type of filter cartridge installed.
(Filter Cartridge NOT included)

Optional Extras

- | | |
|---------------------|------------------|
| A. Wrench | P/No. WAW10HS |
| B. Mounting Bracket | P/No. WABS1020SW |

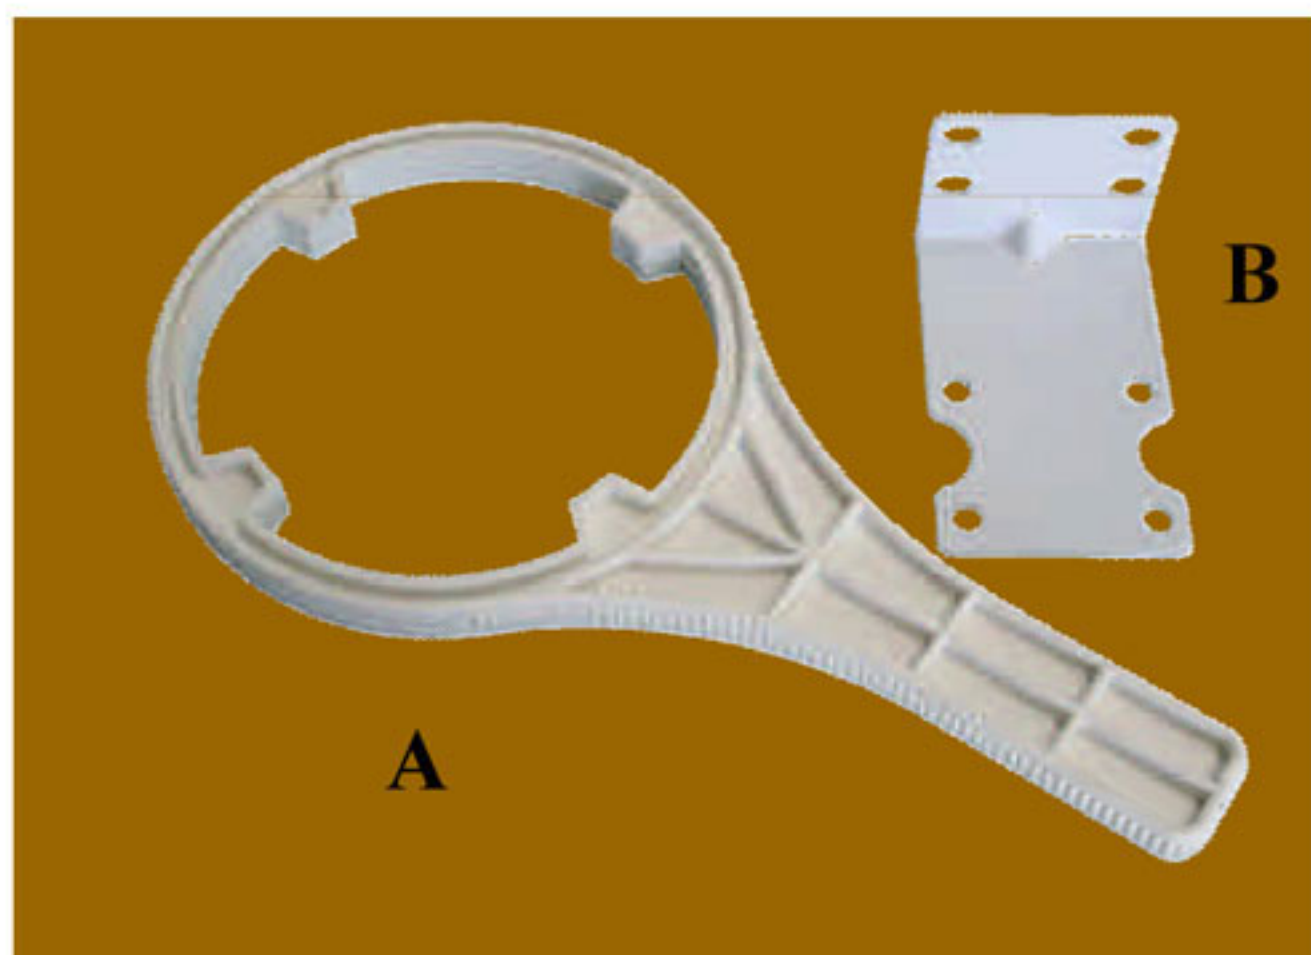

Warning:
For drinking water applications, do not use water that is microbiologically unsafe or of unknown quality without adequate disinfection.

COOLABAH WATER

Ah... that's better !

Series: WH10SW14



Model No.

10"

WH10SW14DO

WH10SW14DOK (Kit)

NOTE: Housings are also sold as Kits which includes; Housing, Bracket, Wrench and Box.

Filter Housing 1/4" White D.O.

Phone
1800 069 800
0269 258 555